


MECHANICAL (mm)

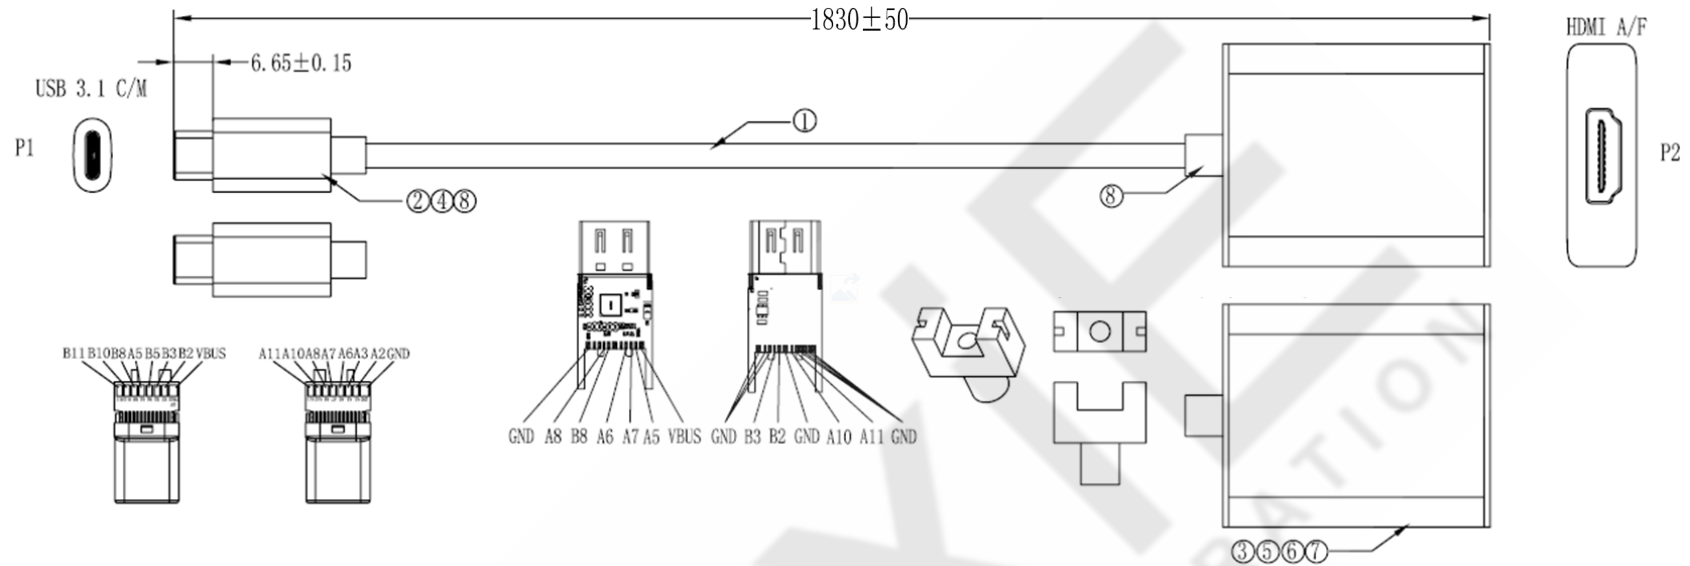

1	USB 3.1	USB3.1 (#32*1P+D+AL+MY_*4C+#32*4C+#32*1P*#26*1C+AB OD=4.00MM L=1830mm (6 FEET)
2	TYPC C/M	C TO 3.0 R2 5.1K 10nF
3	PCBA	USB 3.0 TO RJ45
4	USB3.1	USB3.1 ABS L21*12.30mm
5	MDP-VGA-HDMI	MDP TO VGA/HDMI
6	HDMI/VGA	HDMI TO VGA/HDMI
7	HDMI	HDMI A/F (ABS)
8	PVC	PVC 45P

**MOXIE NOTES :**

The following MoxiE Inductor Corporation Specification shall be considered Confidential in nature. Each person or persons in receipt of this specification shall not disclose any confidential information in whole or in part without written authorization from MoxiE Inductor Corporation.

- TYPE C/M TO HDMI A/F (4K AT 30Hz)
- 100% Open & Short Testing.
- Operating temperature: 0°C to +70°C.
- Storage temperature: -40°C to +85°C.
- RoHS Compliant.
- MoxiE Inductor Corporation custom designs are subject to United States copyright and or patent protection(s).
- MoxiE Inductor Corporation specifications are subject to change without notice.




(888) 535.5207 WWW.MOXIEINDUCTORS.COM

USBC USB 3.1 TO HDMI 6 FEET

MOX-USBHDMI-6

SCHEMATIC

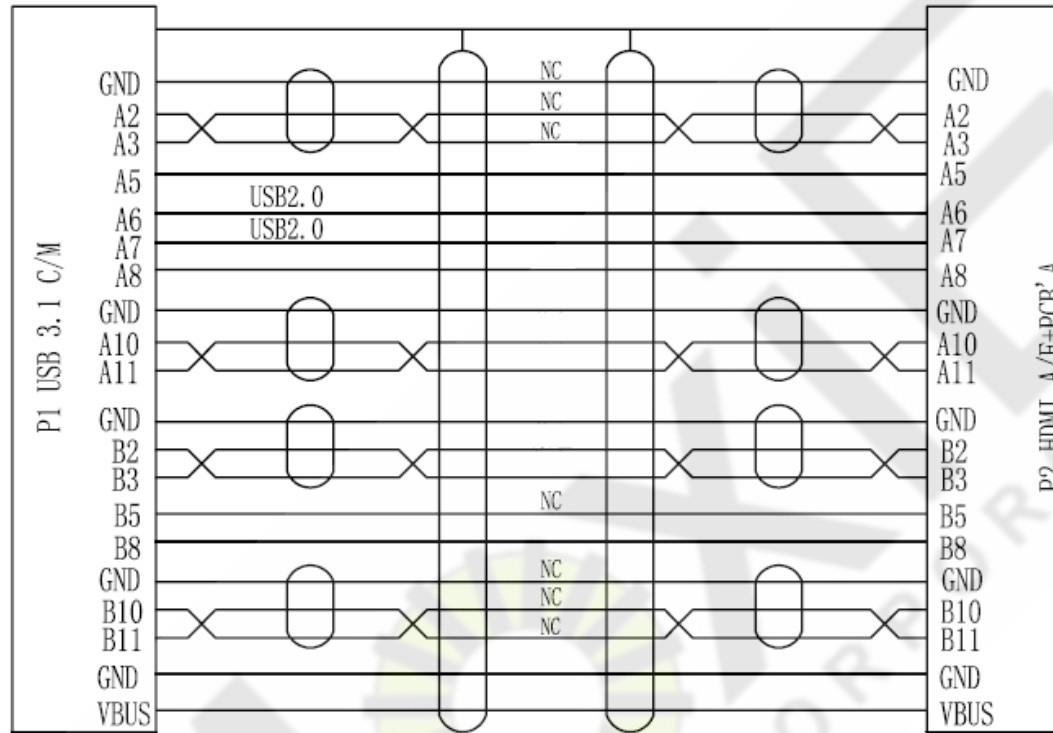

**MOXIE NOTES:**

The following MoxiE Inductor Corporation Specification shall be considered Confidential in nature. Each person or persons in receipt of this specification shall not disclose any confidential information in whole or in part without written authorization from MoxiE Inductor Corporation.

- TYPE C/M TO HDMI A/F (4K AT 30Hz)
- 100% Open & Short Testing.
- Operating temperature: 0°C to +70°C.
- Storage temperature: -40°C to +85°C.
- RoHS Compliant.
- MoxiE Inductor Corporation custom designs are subject to United States copyright and or patent protection(s).
- MoxiE Inductor Corporation specifications are subject to change without notice.



(888) 535.5207 WWW.MOXIEINDUCTORS.COM

USBC USB 3.1 TO HDMI 6 FEET

MOX-USBHDMI-6