


# MECHANICAL (mm)

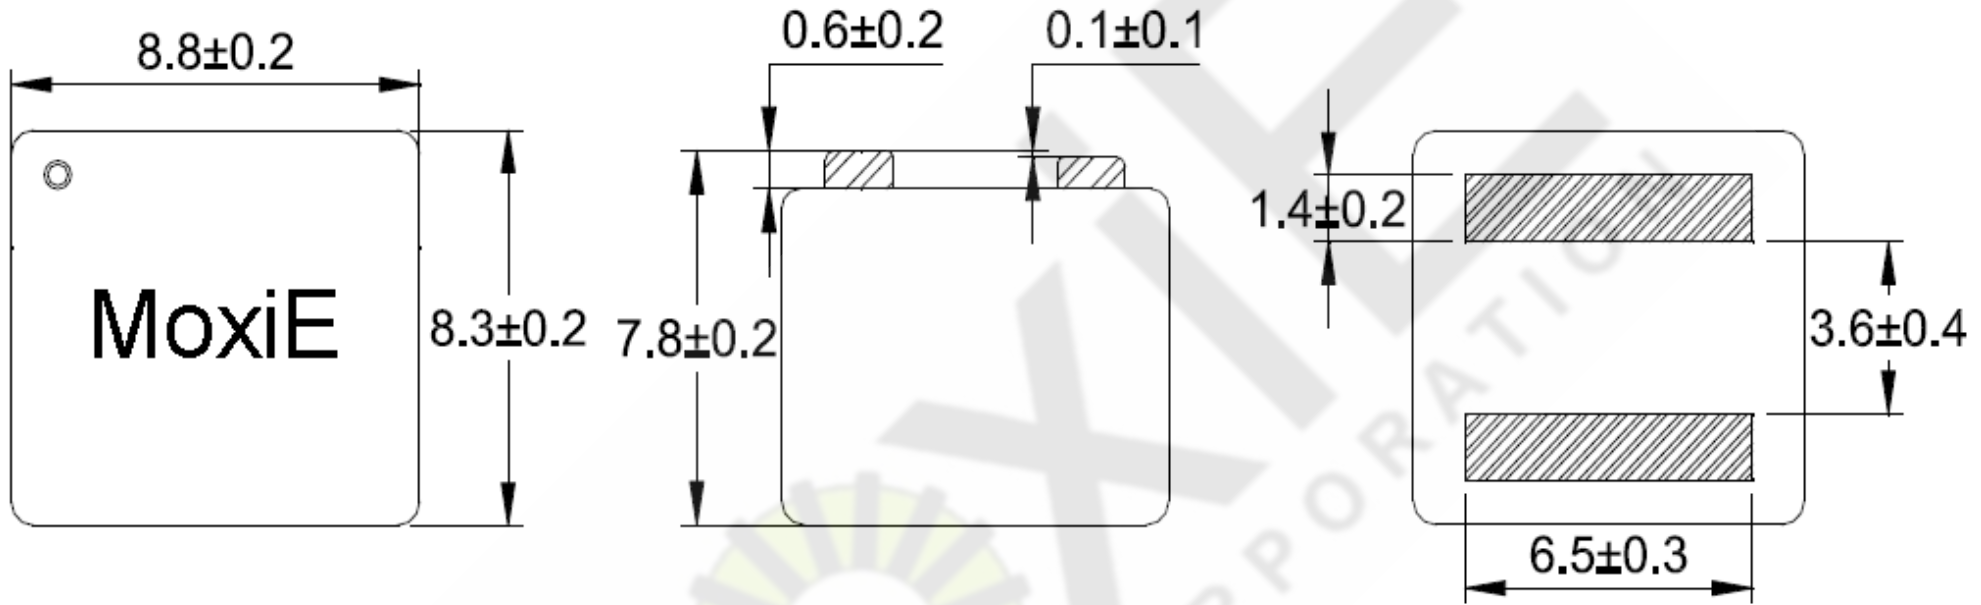

## MOXIE NOTES:

The following MoxiE Inductor Corporation Specification shall be considered Confidential in nature. Each person or persons in receipt of this specification shall not disclose any confidential information in whole or in part without written authorization from MoxiE Inductor Corporation.

- Measurement frequency for Inductance : 100KHz/1.0V.
- DCR measured on 502BC ohm-meter.
- The saturation current : Value of inductance decrease within 30%.
- Temperature rise current : A rise in temperature of core surface is 40°C.
- Magnetically shielded construction.
- Flat wire winding allows low DC resistance.
- Operating temperature: -40°C to +125°C.
- Storage temperature: -40°C to +85°C.
- Packaging: Tape & reel (500 pieces per reel)
- RoHS Compliant.
- MoxiE Inductor Corporation custom designs are subject to United States copyright and or patent protection(s).

**MoxiE**  
INDUCTOR CORPORATION

(888)535.5207 WWW.MOXIEINDUCTORS.COM

FLAT WIRE HIGH CURRENT INDUCTORS


MOXIE HCP-8878 SERIES

PAGE 1/3

REV. A

DWG : MOXHCP8878

## PCB LAYOUT

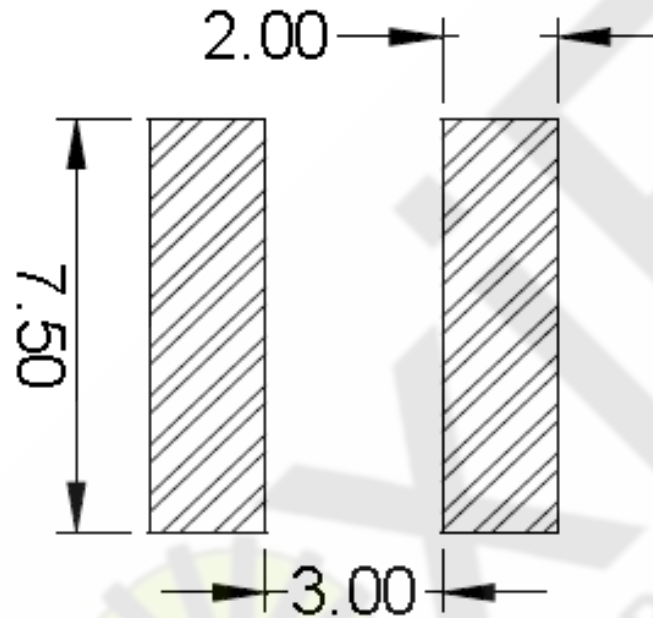

### MOXIE NOTES:

The following MoxiE Inductor Corporation Specification shall be considered Confidential in nature. Each person or persons in receipt of this specification shall not disclose any confidential information in whole or in part without written authorization from MoxiE Inductor Corporation.

- Measurement frequency for Inductance : 100KHz/1.0V.
- DCR measured on 502BC ohm-meter.
- The saturation current : Value of inductance decrease within 30%.
- Temperature rise current : A rise in temperature of core surface is 40°C.
- Magnetically shielded construction.
- Flat wire winding allows low DC resistance.
- Operating temperature: -40°C to +125°C.
- Storage temperature: -40°C to +85°C.
- Packaging: Tape & reel (500 pieces per reel)
- RoHS Compliant.
- MoxiE Inductor Corporation custom designs are subject to United States copyright and or patent protection(s).

**MoxiE**  
INDUCTOR CORPORATION

(888)535.5207 WWW.MOXIEINDUCTORS.COM

FLAT WIRE HIGH CURRENT INDUCTORS

MOXIE HCP-8878 SERIES


PAGE 2/3

REV. A

DWG : MOXHCP8878

# ELECTRICAL

MOXIE PART NUMBER	INDUCTANCE	TOLERANCE	DCR(mΩ) NOM / MAX	ISAT (A) DROP ≤30%	IRMS (A) RISE≤40°C
MOX-HCP-8878-R68M	0.68	±20%	1.35 / 1.65	38.00	37.25
MOX-HCP-8878-1R0M	1.00	±20%	2.05 / 2.25	31.00	34.10
MOX-HCP-8878-2R2M	2.20	±20%	3.65 / 4.05	24.50	21.10
MOX-HCP-8878-4R7M	4.70	±20%	8.60 / 9.45	17.50	17.50
MOX-HCP-8878-6R8M	6.80	±20%	13.40 / 14.80	14.25	11.10
MOX-HCP-8878-100M	10.00	±20%	19.50 / 21.50	11.25	9.25



**SCHEMATIC**

## MOXIE NOTES:

The following MoxiE Inductor Corporation Specification shall be considered Confidential in nature. Each person or persons in receipt of this specification shall not disclose any confidential information in whole or in part without written authorization from MoxiE Inductor Corporation.

- Measurement frequency for Inductance : 100KHz/1.0V.
- DCR measured on 502BC ohm-meter.
- The saturation current : Value of inductance decrease within 30%.
- Temperature rise current : A rise in temperature of core surface is 40°C.
- Magnetically shielded construction.
- Flat wire winding allows low DC resistance.
- Operating temperature: -40°C to +125°C.
- Storage temperature: -40°C to +85°C.
- Packaging: Tape & reel (500 pieces per reel)
- RoHS Compliant.
- MoxiE Inductor Corporation custom designs are subject to United States copyright and or patent protection(s).

**MoxiE**  
INDUCTOR CORPORATION

(888)535.5207 WWW.MOXIEINDUCTORS.COM

FLAT WIRE HIGH CURRENT INDUCTORS

MOXIE HCP-8878 SERIES

PAGE 3/3

REV. A

DWG : MOXHCP8878