
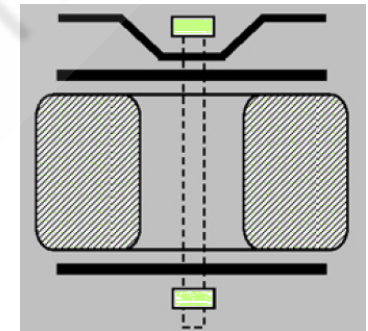


SPECIFICATIONS

RATED POWER (VA)	OUTER DIMENSION (DxH)mm	WEIGHT (KG)	TEMPERATURE RISE
50	80x37	0.71	45
100	95x45	1.24	51
200	112x52	2.04	52
250	118x53	3.36	53
500	140x65	4.20	55
1000	170x75	7.20	58
1500	180x85	9.75	60
2000	185x105	12.00	62
3000	200x120	16.60	64
5000	230x135	24.00	65

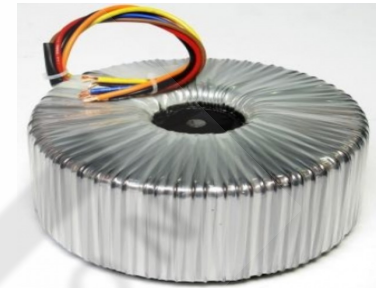

MOXIE NOTES:

The following MoxiE Inductor Corporation Specification shall be considered Confidential in nature. Each person or persons in receipt of this specification shall not disclose any confidential information in whole or in part without written authorization from MoxiE Inductor Corporation.

- MoxiE custom designs available.
- Output range: 50VA to 5000VA.
- Input/Output: Customized.
- Insulation Class: UL class B,F,H,N (optional)
- Isolation: 4KV (Hi-pot)
- Operating temperature: -55°C to +155°C.
- Storage temperature: -40°C to +85°C.
- RoHS Compliant.
- MoxiE Inductor Corporation custom designs are subject to United States copyright and or patent protection(s).
- MoxiE Inductor Corporation specifications are subject to change without notice.
- Tolerances unless otherwise specified: 0-10=±0.15, 10-20=±0.20, 20-40=±0.25, 40-70=±0.30, ≥70=±0.40

MoxiE
INDUCTOR CORPORATION

(888) 535-5207 WWW.MOXIEINDUCTORS.COM

TOROIDAL AUDIO TRANSFORMERS

MOXIE MOX-TRFIA SERIES

PAGE 1/1

REV. A

DWG NMBR: TRFIA