


SPECIFICATIONS

RATED POWER (VA)	OUTER DIMENSION (DxH)mm	WEIGHT (KG)	EFFICIENCY (%)
1000	175x85	9.1	97.0
1500	195x85	11.5	97.0
2000	210x90	14.7	97.5
2500	215x105	16.7	97.5
3000	230x105	17.7	97.5
3500	230x115	21.8	97.7
4800	245x150	31.2	98.0
5200	245x150	31.2	98.3

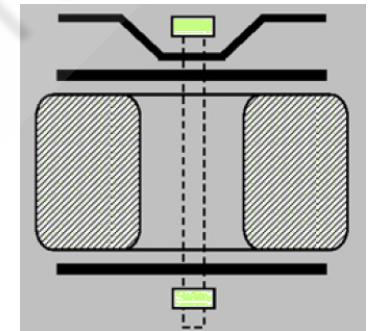

MOXIE NOTES:

The following MoxiE Inductor Corporation Specification shall be considered Confidential in nature. Each person or persons in receipt of this specification shall not disclose any confidential information in whole or in part without written authorization from MoxiE Inductor Corporation.

- MoxiE custom designs available.
- Power range: 1000VA to 5200VA.
- Phase: Single/Three phase.
- Input/Output: Customized.
- Insulation Class: UL class B,F,H,N (optional)
- Isolation: 4KV (Hi-pot)
- Operating temperature: -55°C to +155°C.
- Storage temperature: -40°C to +85°C.
- RoHS Compliant.
- MoxiE Inductor Corporation custom designs are subject to United States copyright and or patent protection(s).
- MoxiE Inductor Corporation specifications are subject to change without notice.
- Tolerances unless otherwise specified: 0-10=±0.15, 10-20=±0.20, 20-40=±0.25, 40-70=±0.30, ≥70=±0.40

MoxiE
SOLAR POWER DESIGNS

(888) 535-5207 WWW.MOXIEINDUCTORS.COM

TOROIDAL TRANSFORMERS FOR SOLAR POWER

MOXIE MOX-TRFIP SERIES

PAGE 1/1

REV. A

DWG NMBR: TRFIP